


TMC261D

17.3-21.2 GHz

Linear Power Amplifier

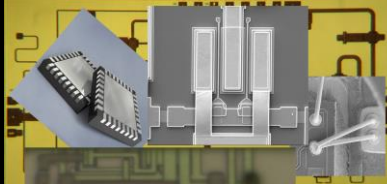

mmTRON
Unleashing the
mmWave Frontier

Product Features

- RF frequency: 17 to 22 GHz
- Linear Gain: 24 dB
- P1dB: 31 dBm
- Die Size: X=3.5 mm, Y=2.5 mm, Z=0.1 mm
- Package Size: X=6 mm, Y=6 mm, Z=0.8 mm or X=5mm, Y=5mm
- DC Bias Point: 18 VDC, 74 mA

Application

- SATCOM Downlink
- LEO Satellites
- Military Radar, EW

Product Description

The TMC261D is a 17.3-21.2 GHz, linear power amplifier die product with high power-added efficiency. TMC261D is designed for use in SATCOM, Instrumentation, Military Radar, and EW applications. The TMC261D is a 50 Ω matched design with built-in DC blocking and ESD protection. To ensure rugged and reliable operation and moisture protection, the TMC160 is designed for maximum reliability. Both bond pad and backside metallization are Au-based that is compatible with ribbon and wedge bonding and high conductivity epoxy and eutectic die attach methods. TMC261D can be biased from 18V to 24V to adjust outpower levels in the 1 to 2W range while maintaining excellent PAE and NPR. The packaged version is available as TMC261 in a 20 lead overmold 5x5 QFN or in a 6x6 Air-Cavity QFN.


**Electrical Performance : Vdd = 18 V, Id1 = 54 mA, Id2 = 20 mA,
TA = 25 °C, F = 20 GHz**

	Min	Typ	Max	Units
Frequency	17.3		21.2	GHz
Small Signal Gain		24		dB
P1dB		31		dBm
PAE @ NPR=13dB		35		%
Pout @ NPR=13dB		1.1		W
Return Loss		20		dB
Drain Voltage		18		V
Drain Bias Current		74		mA

TMC261D


17.3-21.2 GHz

Linear Power Amplifier

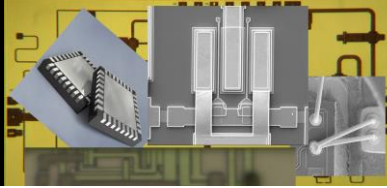

mmTRON
Unleashing the
mmWave Frontier

*Off chip bypassing for each supply pad 100pF to minimize components. Decades of capacitance from 100pF to 10uF for best linearity. One 1mil ball bond per supply pin is required, however VD2 can support 4 ball bonds.

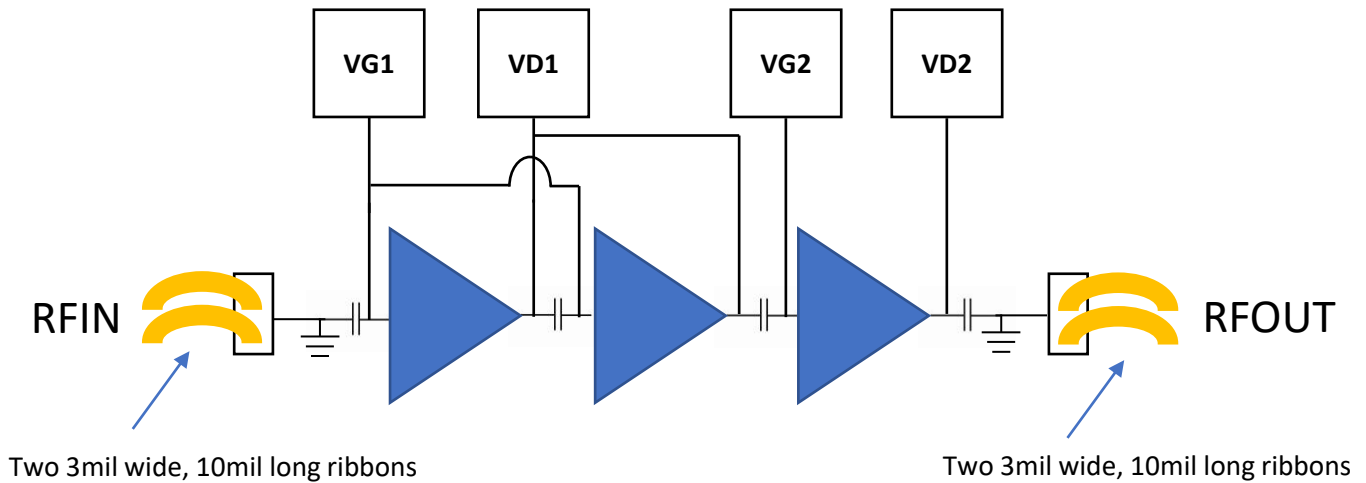


Bias Sequencing: To turn ON the device, VG1, and VG2 are first set at -6V. Then set VD1 and VD2 to 18V. Finally, adjust VG1 and VG2 to achieve $ID1 = 54\text{mA}$ and $ID2 = 20\text{mA}$. To turn OFF the device, you set VG1 and VG2 to -6V, then turn off the VD1 and VD2 followed by turning off VG1 and VG2.


TMC261D

17.3-21.2 GHz

Linear Power Amplifier

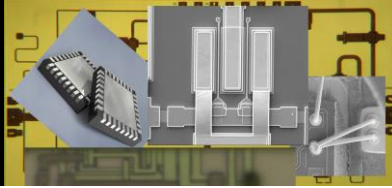

mmTRON
Unleashing the
mmWave Frontier

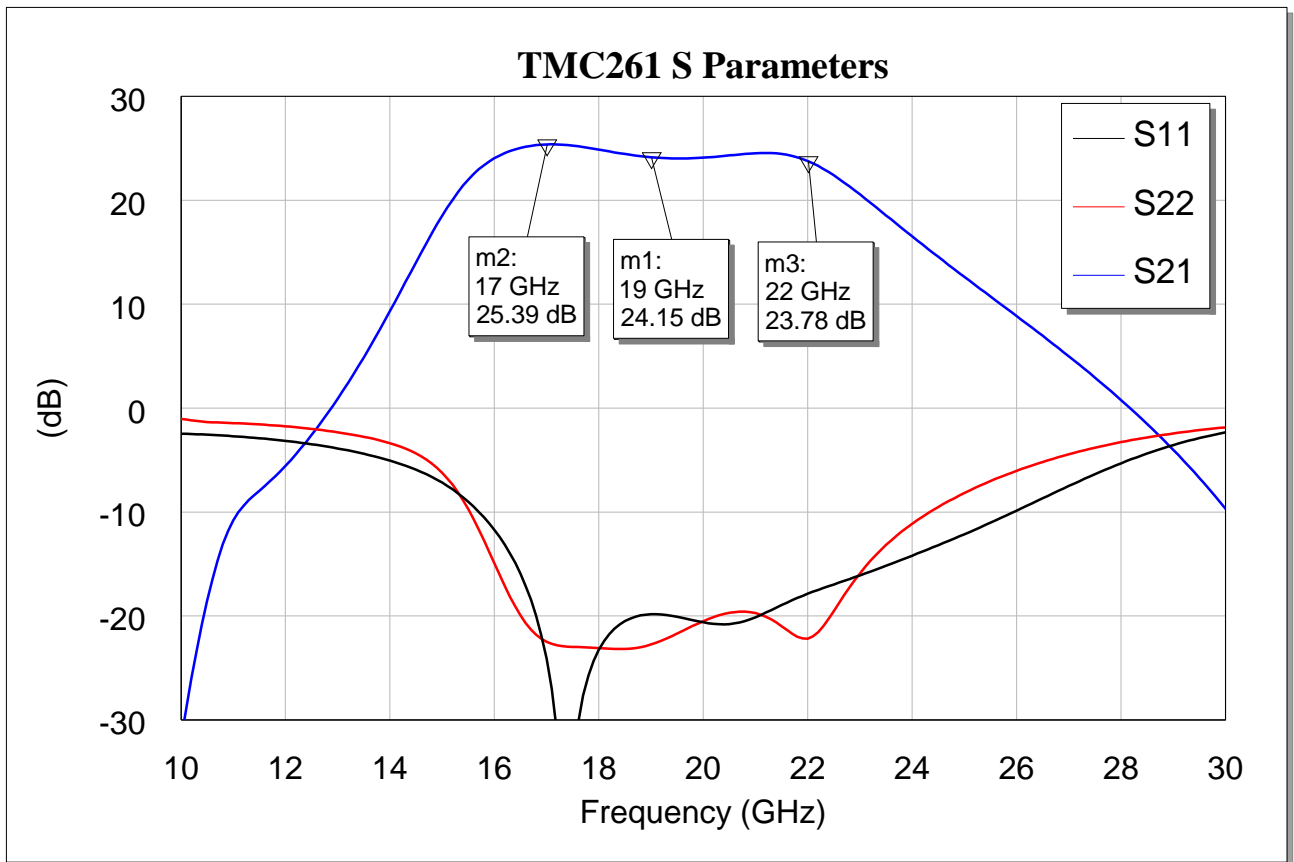


*VD1 = VD2 = 18V, ID1 = 54mA, ID2 = 20mA, Tamb = 25C


TMC261D

17.3-21.2 GHz

Linear Power Amplifier

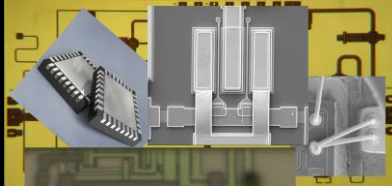

mmTRON
Unleashing the
mmWave Frontier

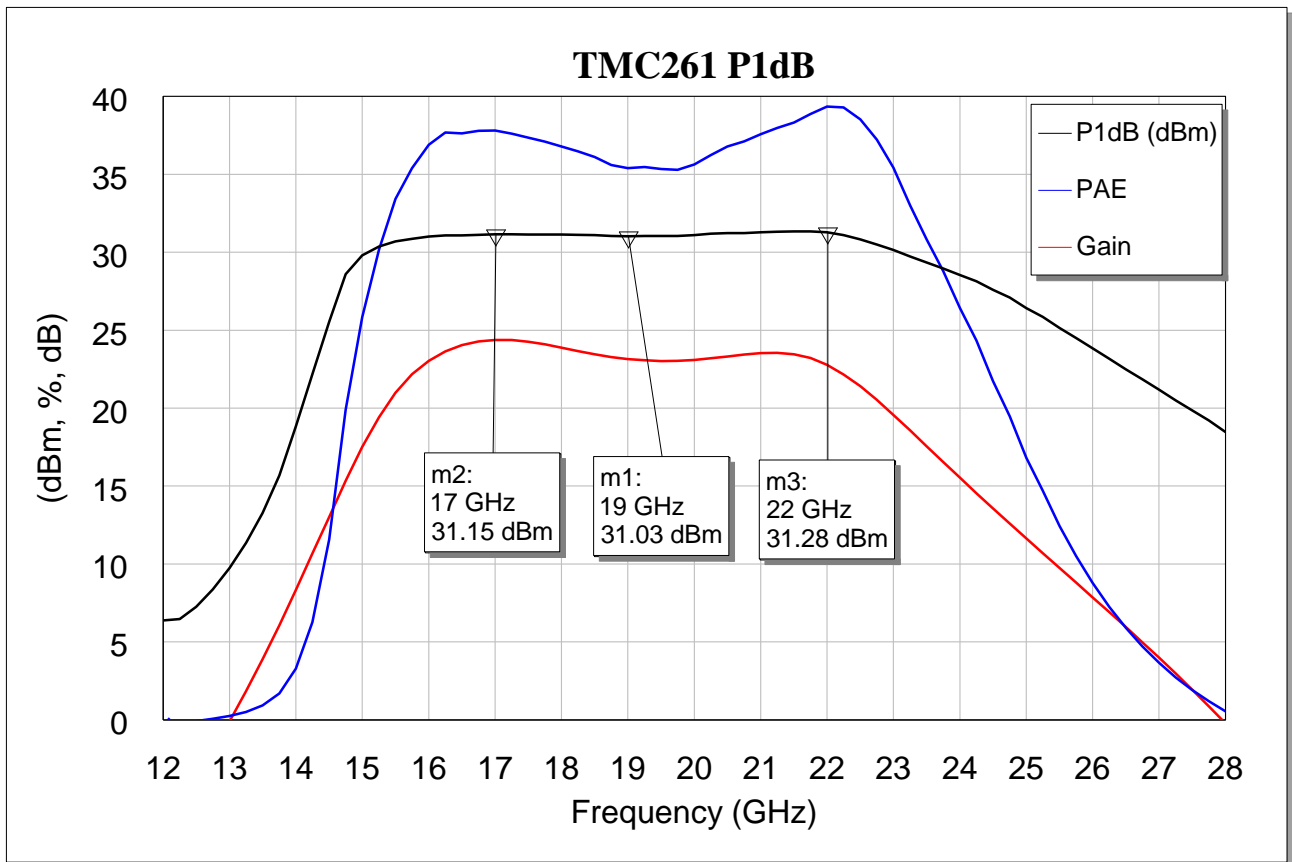


*VD1 = VD2 = 18V, ID1 = 54mA, ID2 = 20mA, Tamb = 25C


TMC261D

17.3-21.2 GHz

Linear Power Amplifier

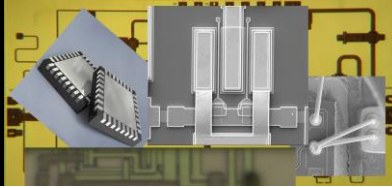

mmTRON
Unleashing the
mmWave Frontier

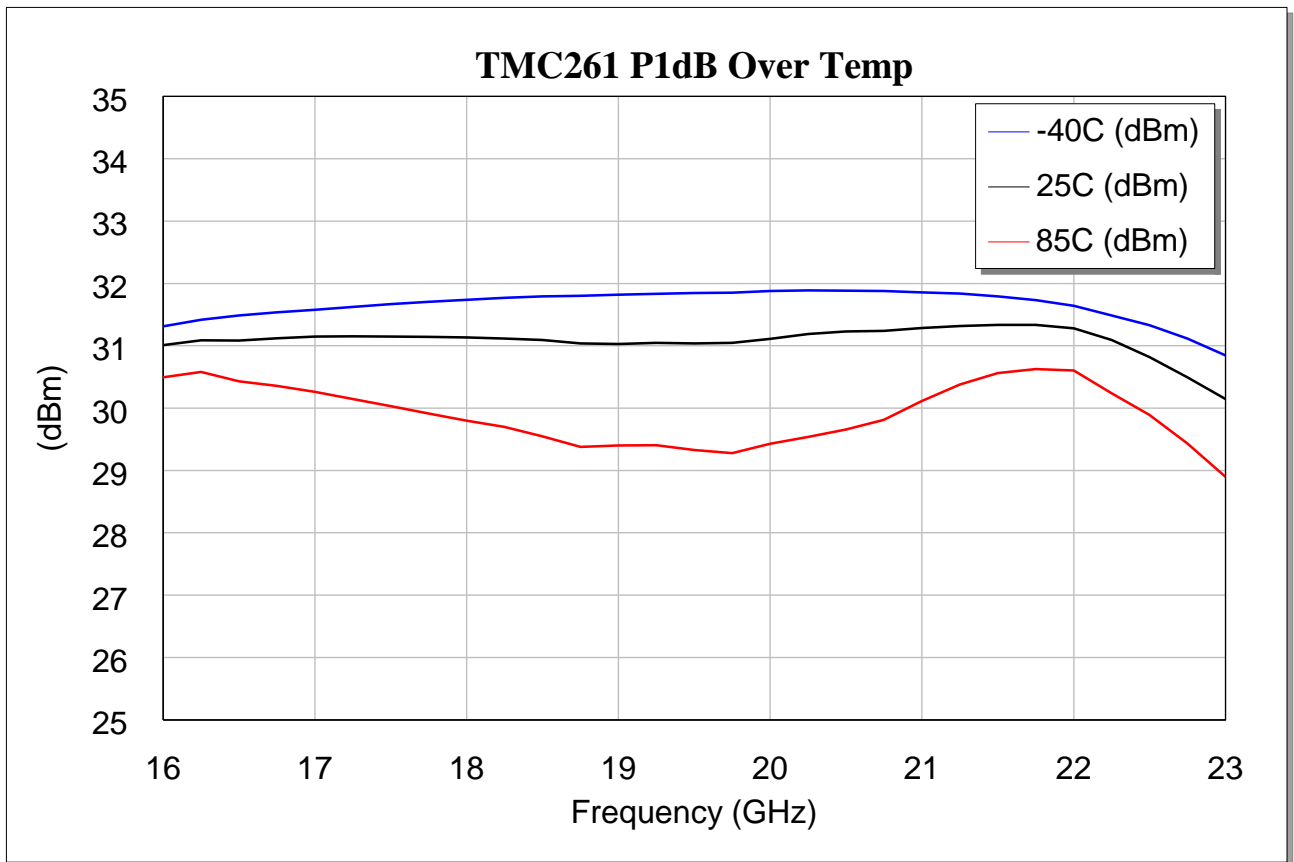


*VD1 = VD2 = 18V, ID1 = 54mA, ID2 = 20mA, Tamb = 25C

** Biased at Tamb and voltages fixed over temperature


TMC261D

17.3-21.2 GHz

Linear Power Amplifier

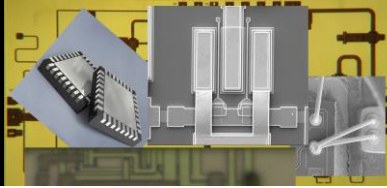

mmTRON
Unleashing the
mmWave Frontier

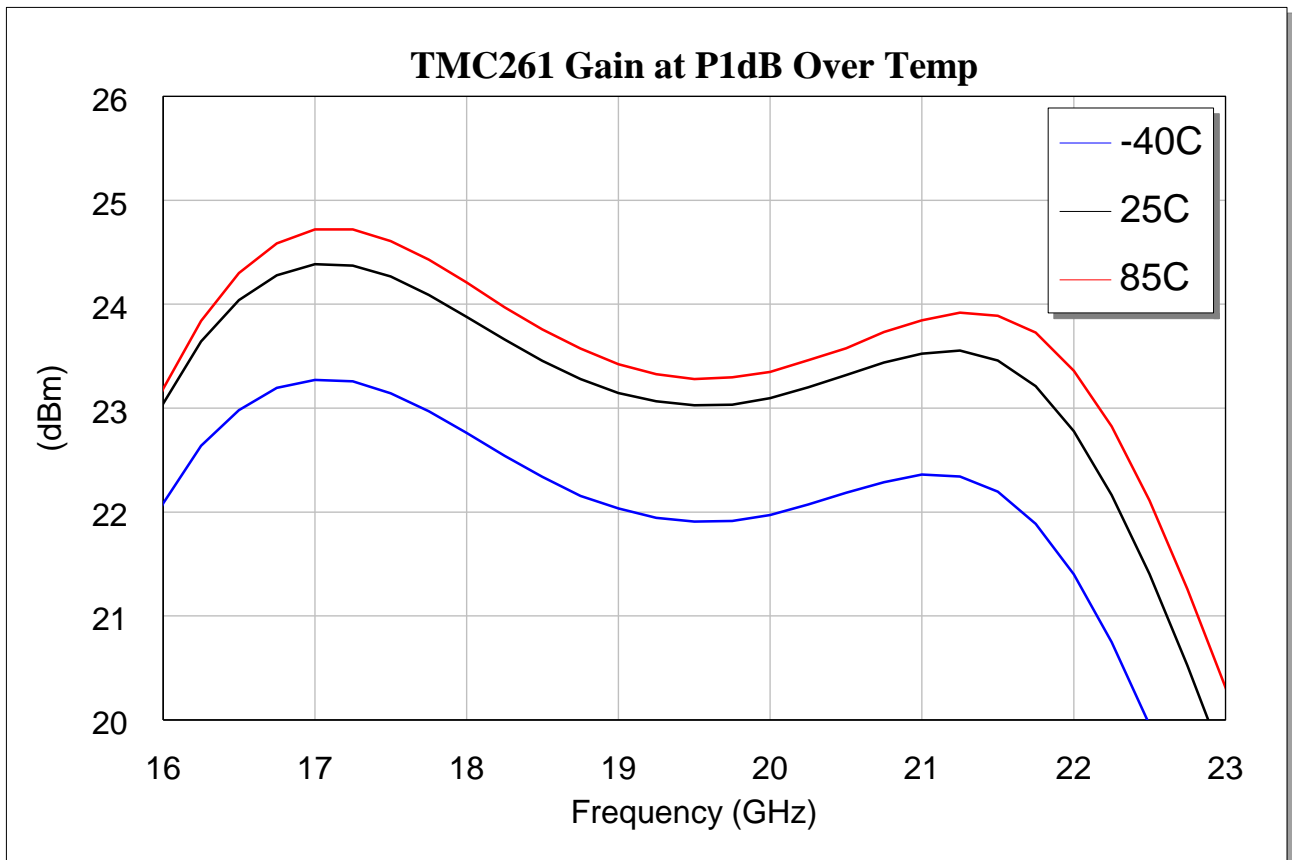


*VD1 = VD2 = 18V, ID1 = 54mA, ID2 = 20mA, Tamb = 25C

** Biased at Tamb and voltages fixed over temperature


TMC261D

17.3-21.2 GHz

Linear Power Amplifier

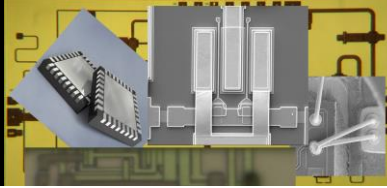

mmTRON
Unleashing the
mmWave Frontier

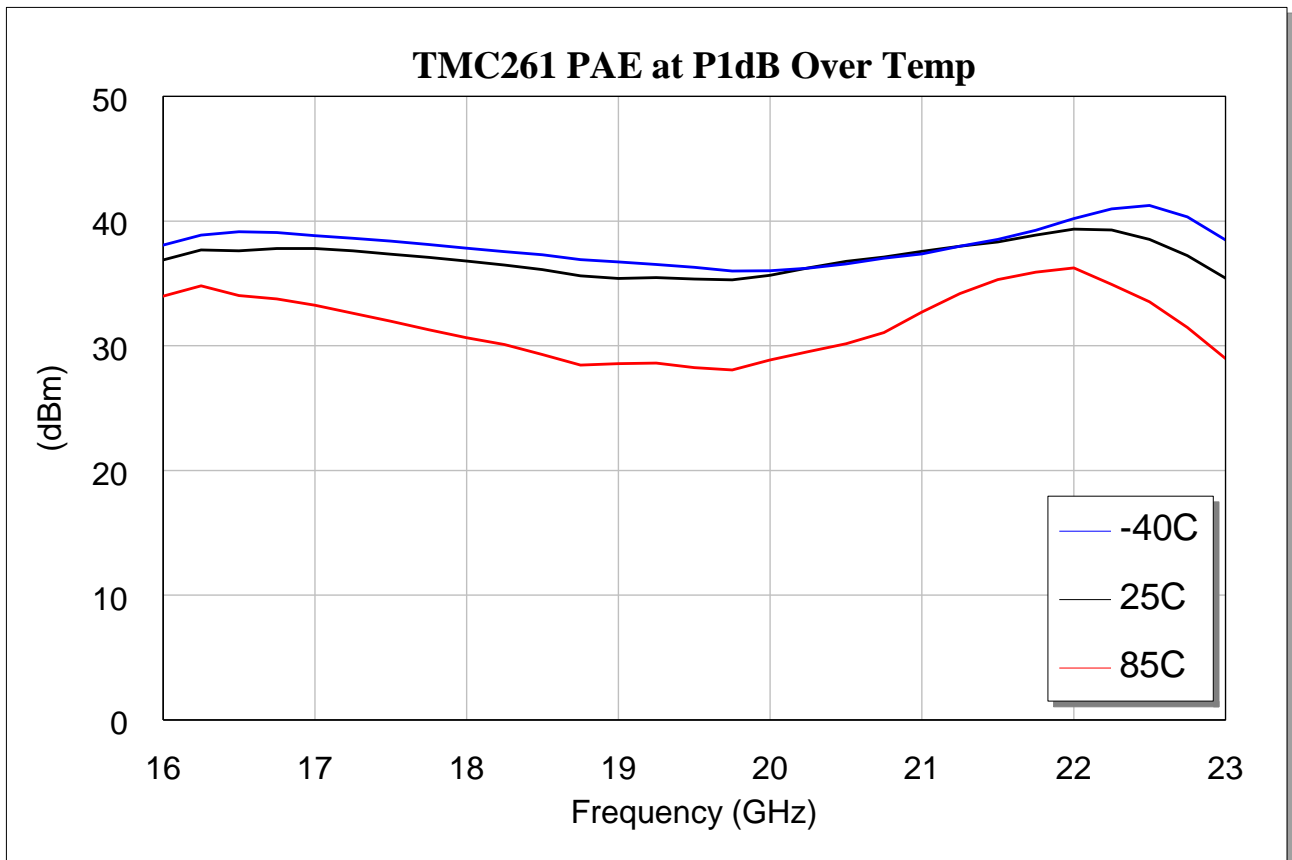


*VD1 = VD2 = 18V, ID1 = 54mA, ID2 = 20mA, Tamb = 25C

** Biased at Tamb and voltages fixed over temperature


TMC261D

17.3-21.2 GHz

Linear Power Amplifier

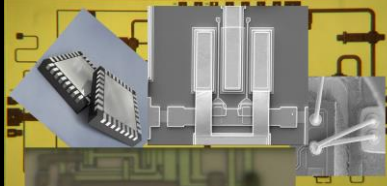

mmTRON
Unleashing the
mmWave Frontier

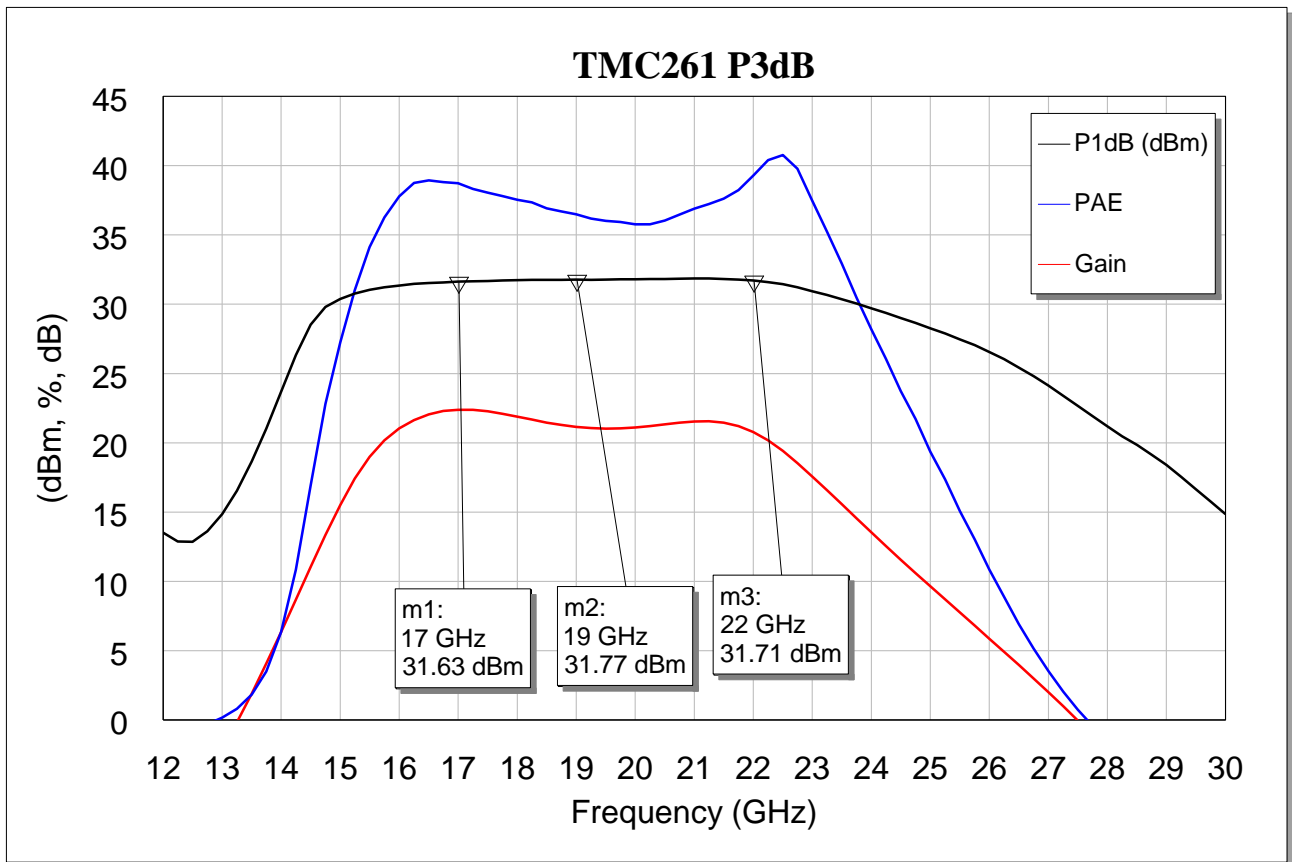


*VD1 = VD2 = 18V, ID1 = 54mA, ID2 = 20mA, Tamb = 25C


TMC261D

17.3-21.2 GHz

Linear Power Amplifier

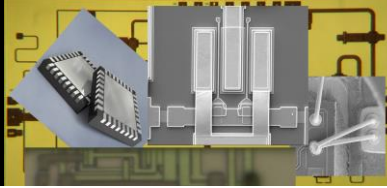

mmTRON
Unleashing the
mmWave Frontier

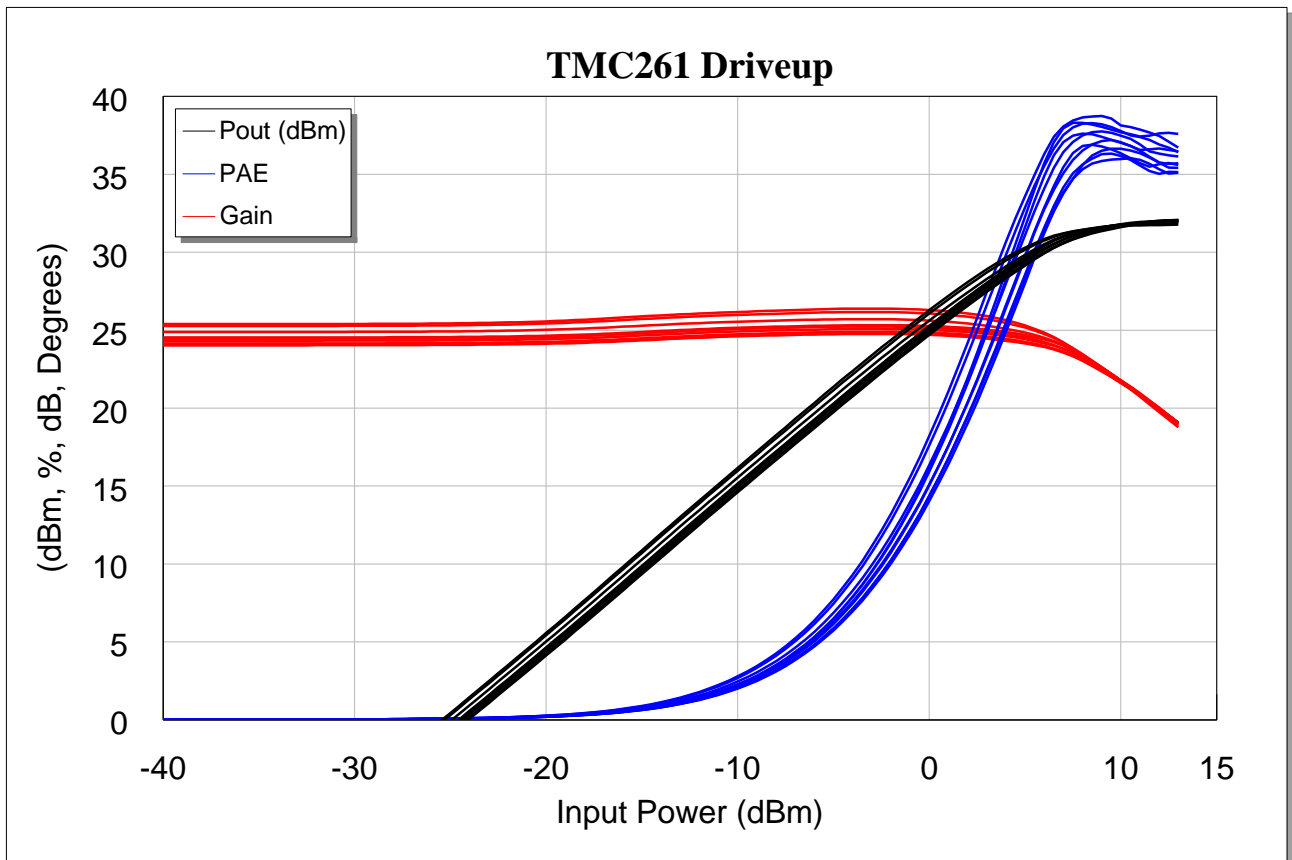


*VD1 = VD2 = 18V, ID1 = 54mA, ID2 = 20mA, Tamb = 25C


TMC261D

17.3-21.2 GHz


Linear Power Amplifier

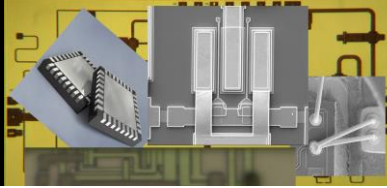

mmTRON
Unleashing the
mmWave Frontier

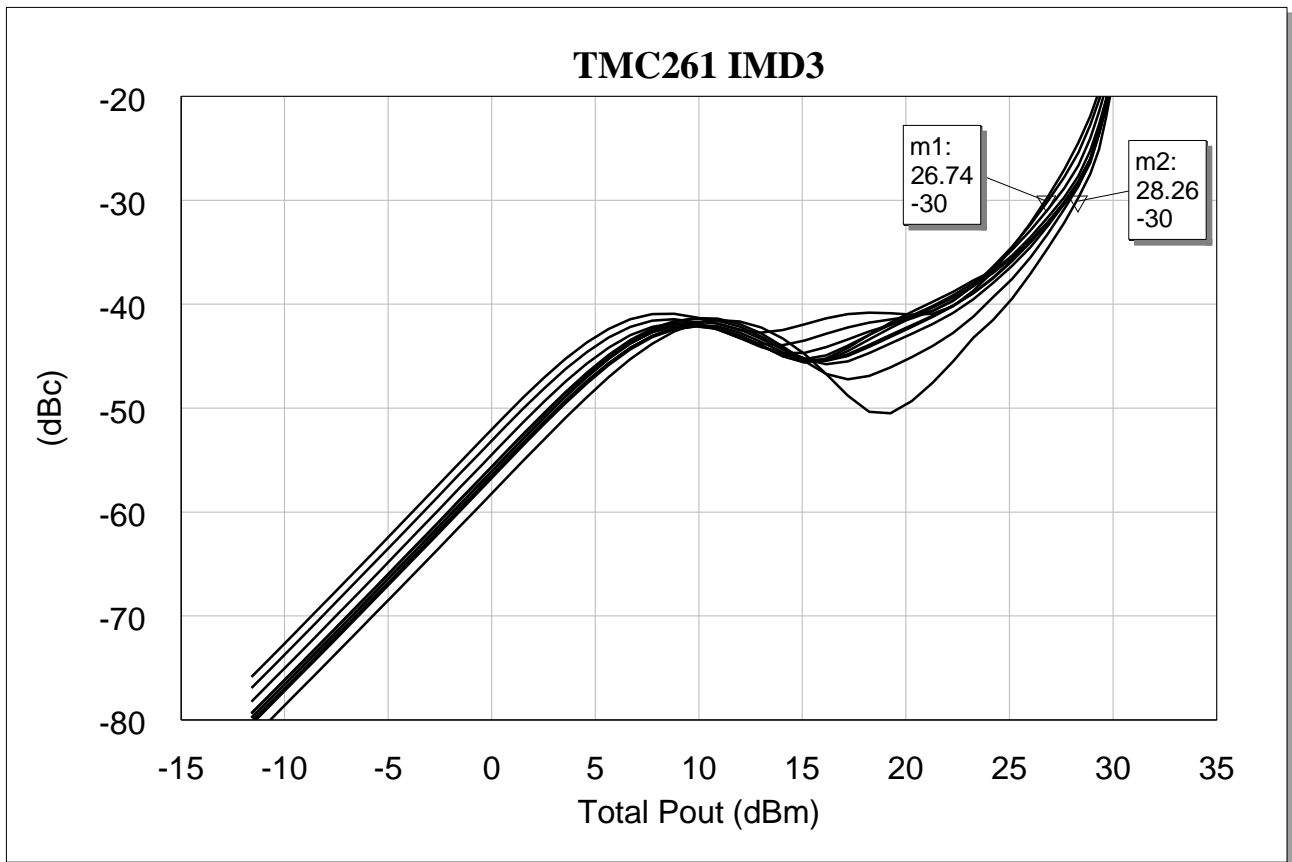

*VD1 = VD2 = 18V, ID1 = 54mA, ID2 = 20mA, Tamb = 25C,
Tone Spacing = 100 MHz

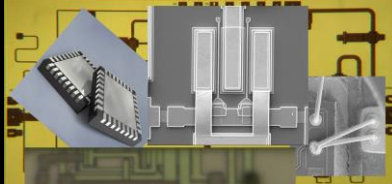

• Recommended Biasing

- The TMC261D is operated with one positive supply VDD (VD1=VD2) and two negative supply voltages VG1 and VG2 (this optimizes linearity). The positive supply must be connected to VD1 and VD2 pads on the die. The negative voltages to VG1 and VG2 on the die. VG1 and VG2 are biased to -6V first, then VDD is gradually biased to +18V and finally, VG1 and VG2 are adjusted to around -4.1V and 4.2V, respectively, for ID1 = 54mA and ID2 = 20mA DC current.
- Reverse the sequence during power down, i.e. bring the VG1 and VG2 to -6V, lower VDD to 0V, and then VG1 and VG2 to 0V.

• Assembly Techniques

- The TMC261D is fabricated using a GaN-based semiconductor material structure and may be packaged in an air-cavity QFN or used as a die. The die is designed to allow either epoxy or eutectic attach.

• ESD Warning

- III-V MMICs are ESD-sensitive. Preventative ESD measures must be employed in all aspects of storage, handling, and assembly. MMIC ESD precautions, handling considerations, and die-attach and bonding methods are critical factors in successful III-V MMIC performance and reliability.


• RoHS Compliance

- This part is RoHS compliant, meeting the requirements of the EU Restriction of Hazardous Substances Directive 2002/95/EC, commonly known as RoHS. Six substances are regulated: lead, mercury, cadmium, chromium VI (hexavalent chromium), polybrominated biphenyls (PBB), and polybrominated biphenyl ethers (PBDE). RoHS compliance requires that any residual concentration of these substances is below the Directive's maximum concentration values (MCV): cadmium 100ppm by weight and all others 1000ppm by weight.


TMC261D

17.3-21.2 GHz

Linear Power Amplifier

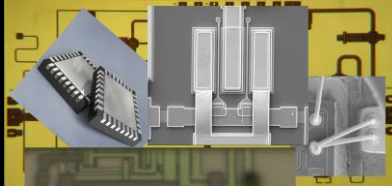

mmTRON
Unleashing the
mmWave Frontier

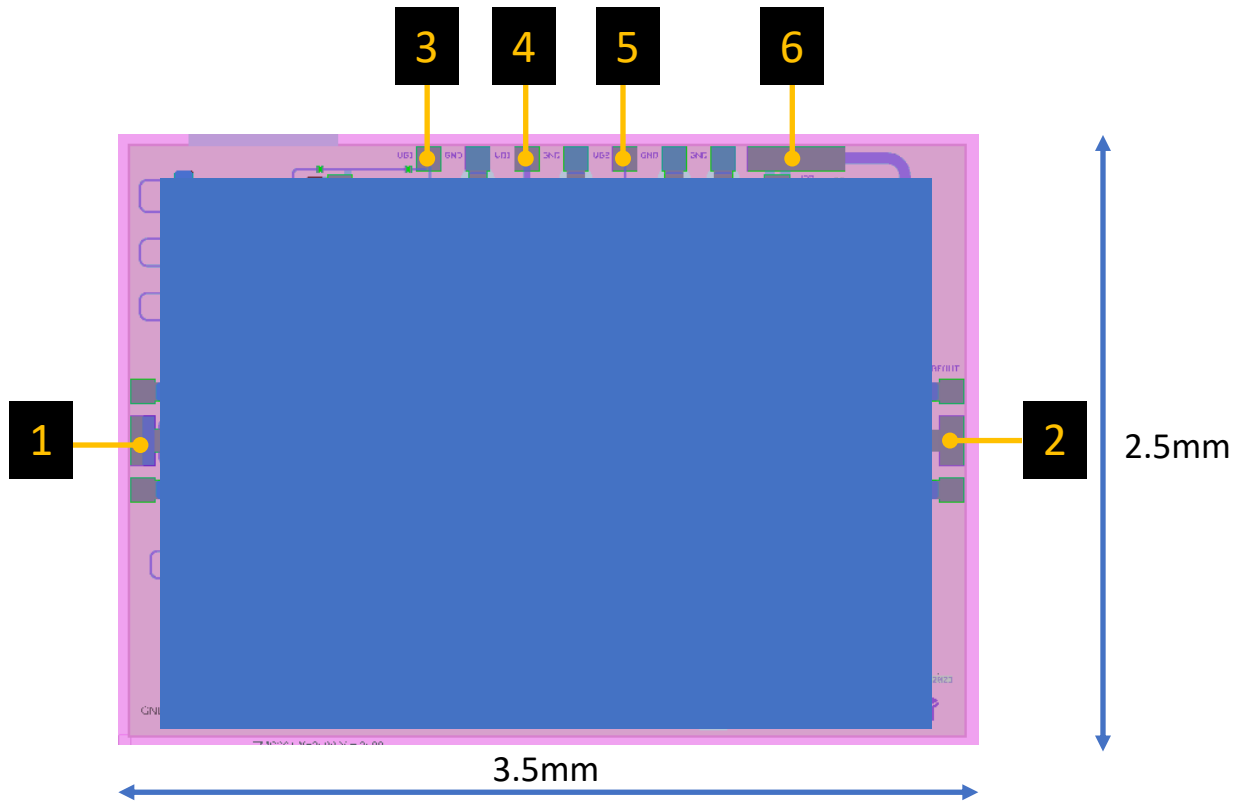


Pad #	Function
1	RFIN
2	RFOUT
3	VG1
4	VD1
5	VG2
6	VD2

TMC261D

17.3-21.2 GHz


Linear Power Amplifier

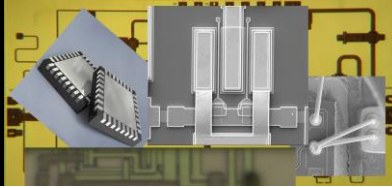

mmTRON
Unleashing the
mmWave Frontier




Pin#	Function
3	GND
4	RF Input
5	GND
17	GND
18	RF Output
19	GND
23	VD2
24	VG2
25	VD1
26	VG1
Other pins	GND

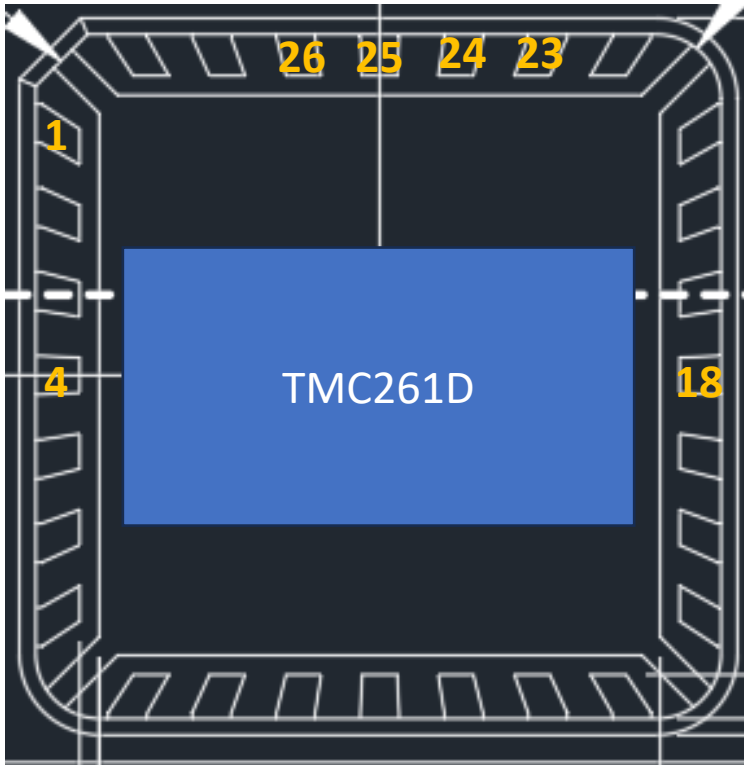


TMC261D

17.3-21.2 GHz

Linear Power Amplifier

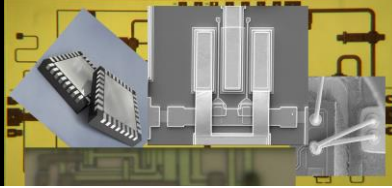


mmTRON
Unleashing the
mmWave Frontier

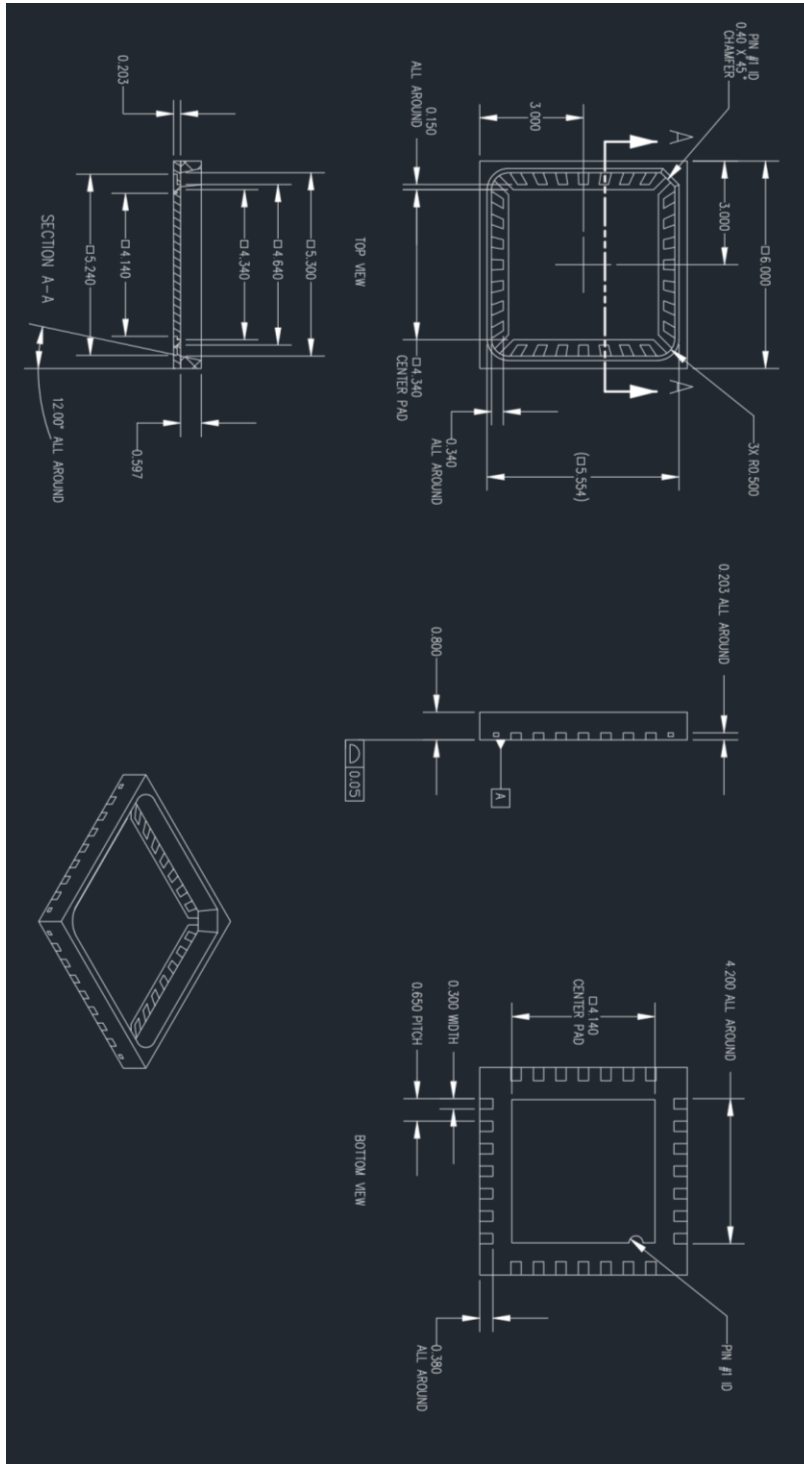





TMC261D

17.3-21.2 GHz

Linear Power Amplifier

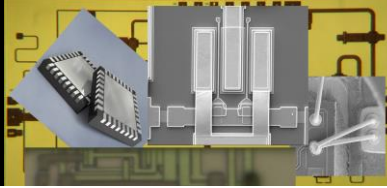

mmTRON
Unleashing the
mmWave Frontier

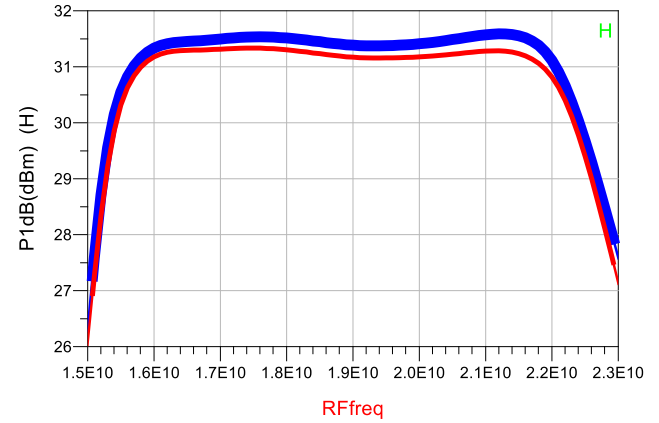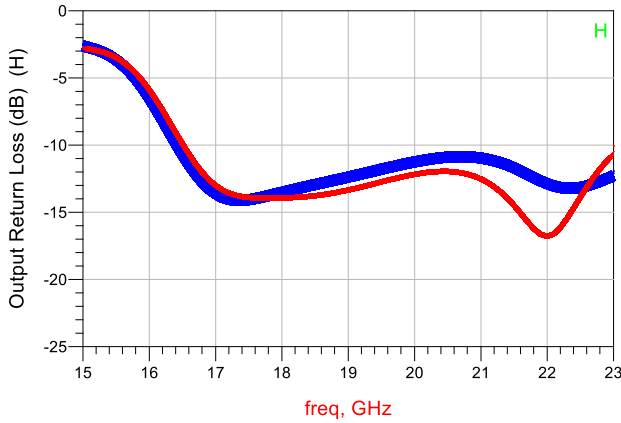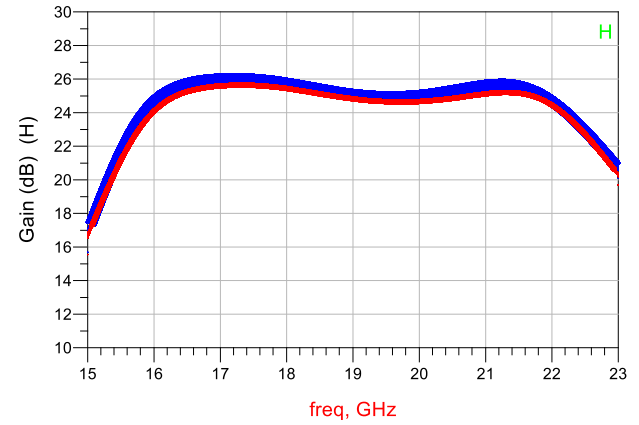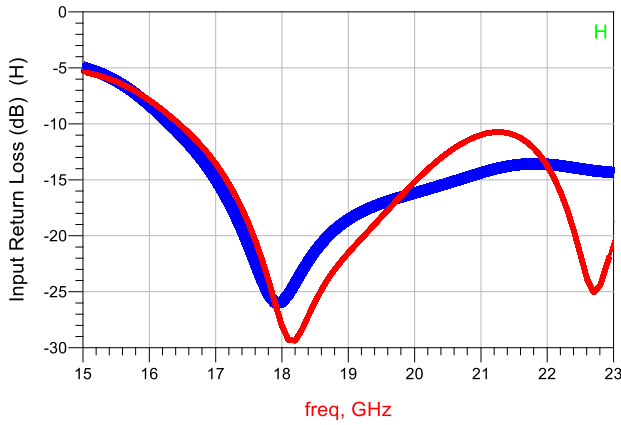


Blue : Bare Die in a fixture (including wire bonds)

Red: Packaged on a PCB (including Package to PCB Transition)

TMC261D

17.3-21.2 GHz

Linear Power Amplifier

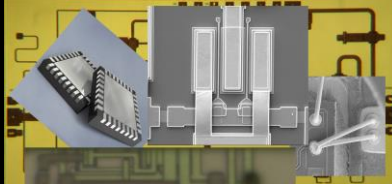

mmTRON
Unleashing the
mmWave Frontier

mmTron Inc. (“mmTron”). All rights reserved.

The information contained in this this datasheet is for reference only. All specifications are subject to change without prior notice.

Except as provided in its Terms and Conditions of Sale or any separate agreement, mmTron assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which mmTron may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights. THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF mmTron PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS. mmTron products are not intended for use in medical, lifesaving or life sustaining applications. mmTron customers using or selling mmTron products for use in such applications do so at their own risk and agree to fully indemnify mmTron for any damages resulting from such improper use or sale. These items are controlled by the U.S. Government and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. government or as otherwise authorized by U.S. law and regulations’.

The product layout, and specification are mmTron Proprietary and confidential information. The recipient agrees not to copy, alter, modify, reverse engineer, or attempt to derive the composition or underlying information, structure or ideas of any Confidential Information and must not remove, overprint, deface or change any notice of confidentiality, copyright, trademark, logo, legend or other notices of ownership from any originals or copies of mmTron’s information.