mmTron
Unleashing the mmWave Frontier

TMC654-D
DC-55 GHz Distributed Low Noise Amplifier

Product Features

- RF frequency: DC to 55 GHz
- Linear Gain: 9 dB
- Noise Figure: 3.5 dB
- Die Size: X=1.65 mm, Y=1 mm, Z=0.05mm
- DC Power: 5 VDC, 60 mA

Application

- Point-to-Point Radios and VSATs
- Test instrumentation
- Fiber Optics
- Military, EW and Space

Product Description

The TMC654D GaAs PHEMT Distributed amplifier is a broadband low noise device, designed for use in Radios, Test instrumentation, Military, EW and Space applications. The TMC654D is a 50 W matched design providing 3.5dB of noise figure, offers excellent return loss at low-end for optical instrumentation, interface to photodiodes, and eliminates the need for RF port matching. Both bond pad and backside metallization are Au-based that is compatible with ribbon and wedge bonding and high conductivity epoxy and eutectic die attach methods.

Electrical Performance : **Vdd = 5 V, Vgg = -0.3 V, TA = 25 °C, F = 50 GHz**

	min	Typ	Max	Units
Frequency	DC		55	GHz
Gain		9		dB
P1dB		12		dBm
Psat		13		dBm
Noise Figure		3.5		dB
OIP3		20		dBm
Bias Voltage		5		V
Bias Current		60		mA

mmTron Inc. reserves the right to make changes to the product(s) or information contained herein without notice. Version 3.1 2024
For additional information and application support please visit: https://www.mmTron.com/contact

TMC654 Input Return Loss

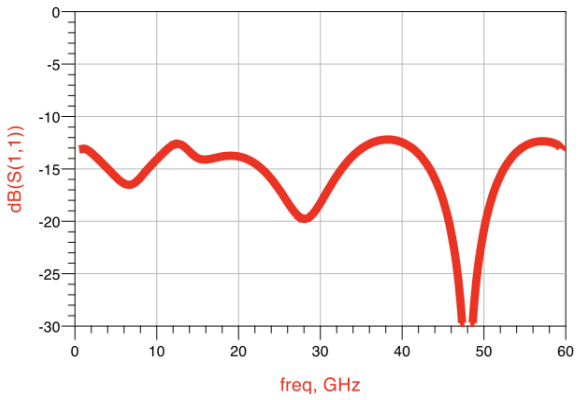

TMC654 Reverse Isolation

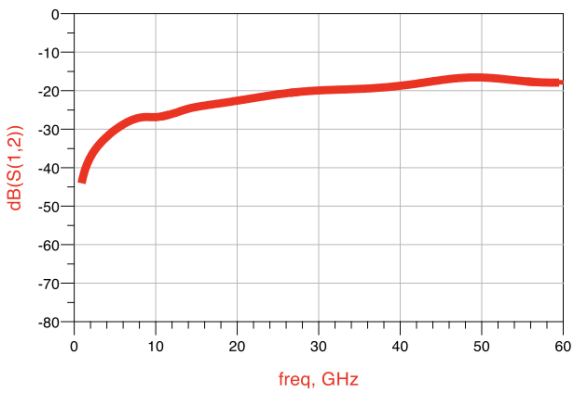

TMC654 Gain

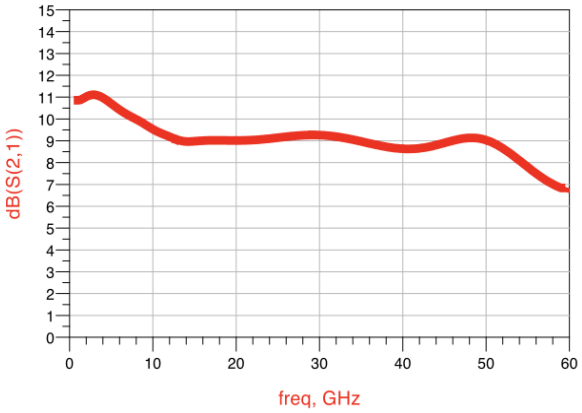

TMC654 Output Return Loss

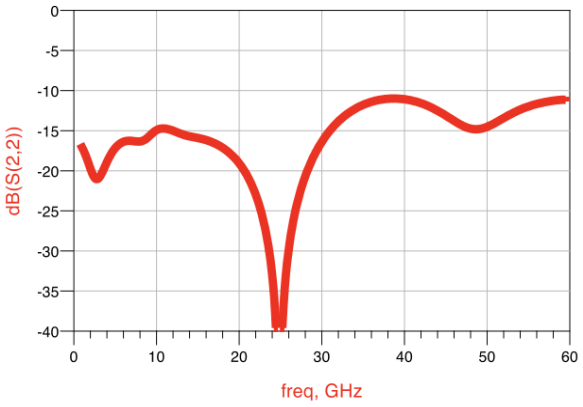

TMC654 Noise Figure

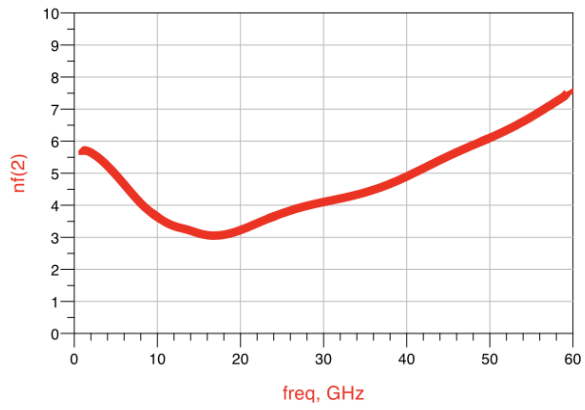

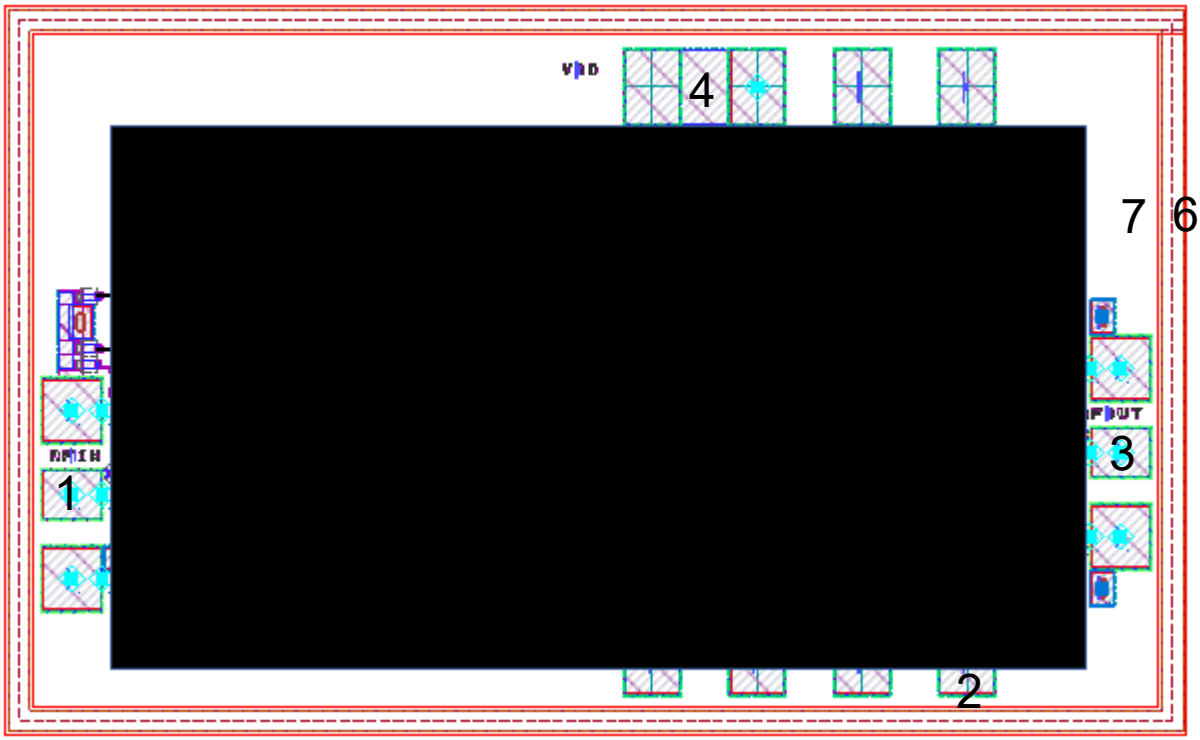

Pad #	Function
1	RF INPUT
2	VGG BIAS
3	RF OUTPUT
4	VDD

1. The low frequency operation can be extended to kHz range by adjusting the bypass capacitances connected to Pads # 4-7.
2. DXF and detailed assembly drawings are available on request.



Electrostatic Discharge Caution

This integrated circuit can be damaged by ESD. mmTron Inc. recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications. III-V MMICs are ESD-sensitive. Preventative ESD measures must be employed in all aspects of storage, handling, and assembly. MMIC ESD precautions, handling considerations, and die-attach and bonding methods are critical factors in successful III-V MMIC performance and reliability.



RoHS Compliant

This part is RoHS compliant, meeting the requirements of the EU Restriction of Hazardous Substances Directive 2002/95/EC, commonly known as RoHS. Six substances are regulated: lead, mercury, cadmium, chromium VI (hexavalent chromium), polybrominated biphenyls (PBB), and polybrominated biphenyl ethers (PBDE). RoHS compliance requires that any residual concentration of these substances is below the Directive's maximum concentration values (MCV): cadmium 100ppm by weight and all others 1000ppm by weight.

Disclaimer and Warranty Statement

© 2025 mmTron Inc. ("mmTron"). All rights reserved.

The information contained in this datasheet is for reference only. All specifications are subject to change without prior notice.

Except as provided in its Terms and Conditions of Sale or any separate agreement, mmTron assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which mmTron may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights. THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF mmTron PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

mmTron products are not intended for use in medical, lifesaving or life sustaining applications. mmTron customers using or selling mmTron products for use in such applications do so at their own risk and agree to fully indemnify mmTron for any damages resulting from such improper use or sale. These items are controlled by the U.S. Government and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. government or as otherwise authorized by U.S. law and regulations'.

The product layout, and specification are mmTron Proprietary and confidential information. The recipient agrees not to copy, alter, modify, reverse engineer, or attempt to derive the composition or underlying information, structure or ideas of any Confidential Information and must not remove, overprint, deface or change any notice of confidentiality, copyright, trademark, logo, legend or other notices of ownership from any originals or copies of mmTron's information.